

# Profilift 2.40 F460/Fn460

Electro-hydraulic twin-ram lift, 4 t capacity, platforms



## Application

- Check-in
- Repairs and maintenance
- Wheel alignment
- Testing

## Approvals / recommendations

- Jaguar:
- Landrover:
- Volkswagen Group:
- Volvo:
- PL 2.40 F 460
- Renault

## Description:

### Steel cassette:

- Waterproof steel cassette

### Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Pump unit with immersed motor
- Hydraulic oil
- Pneumatic emergency lowering
- Programmable pushbutton control unit

### Superstructure:

- A set of platforms with drive-on ramps and stops
- High-quality anti-slip coating in RAL 7016 - grey

### Free-wheel lift Fn:

- Free-wheel lift with adjustability lengthwise
- Rubber-coated, non-skid pads
- Low minimum height

### Standard colours:

- Platforms: RAL 9006 - white
- Free-wheel lift: RAL 9006 - white aluminium
- Ramps: Red 3020 - red

## Versions:

### Steel cassette:

- Zinc-coated
- Coated
- Self-carrying

### Installation:

- Superstructure on floor
- Superstructure in floor with or without flush floor device
- Ceiling installation

## Optional extras:

### Superstructure Platform:

- Supporting legs for wheel alignment
- Aluminium coating
- Scissor jack
- Play detector
- Lighting set

### Superstructure Fn:

- XY-pads

**Zinc coating and special colours on request!**



Click the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)


Technical data	
Lifting capacity	4,000 kg
Lifting height	1,925 mm
Working height	2,075 mm
Cylinder diameter	2 x 140 mm
Distance between cylinders	1,315 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	approx. 10 l
Voltage	230 / 400 V – 50 Hz – 16 A

Free-wheel lift (Fn 460)	
Lifting capacity	3,500 Kg
Length	1,600 – 2,300 mm
Lifting height	370 mm + Rubber pads
Min. height	30 mm
Lifting / lowering time (high pressure)	approx. 8 sec.
Operation	elektro-hydraulic

Platforms	
Total length	approx. 5,725 mm
Usable length of platform	4,600 mm
Wheel base	approx. 4,100 mm
Platform width	605 mm
Distance between platforms	910 mm
Drive-on height	150 mm

Scissor jack (Option)	
Lifting capacity	2,000 Kg
Lifting height	250 mm
Operation	air-hydraulic
Lift positions	middle / 790 – 1,610 mm


GST play detector (optional extra)	
Max. axle load	2,500 Kg
Operation	hydraulic

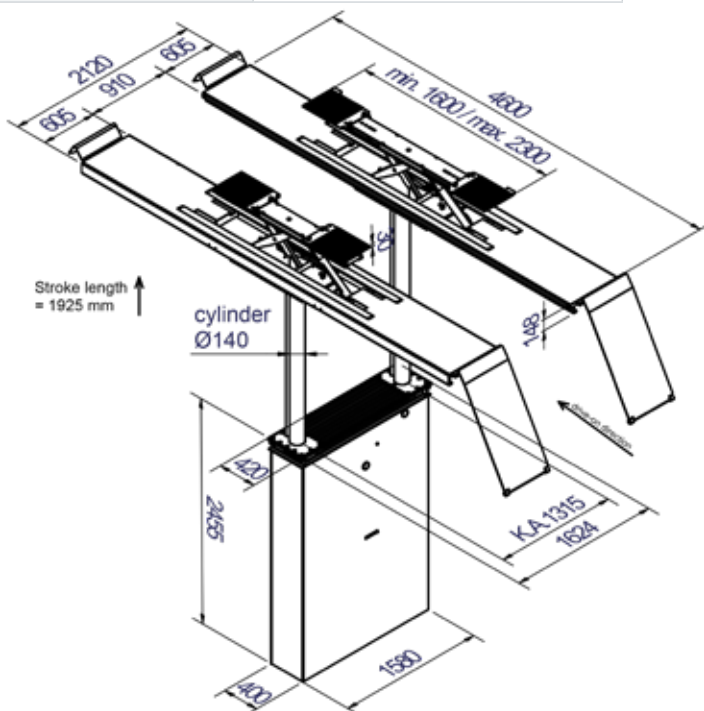

Supporting legs



Integrated free-wheel lift

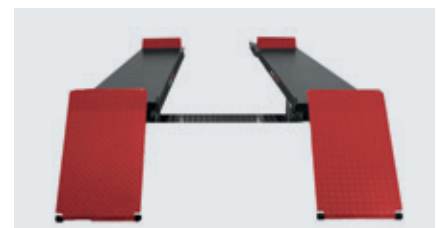

Flush platforms