

Testmaster RT187-2

Roller brake tester



Application

- Check-in
- Repair and maintenance
- Testing
- General inspection

Optional extra: Digital display



Description:

- 2 galvanized roller sets (split version) for hanging installation (frame required for weighing device, also if retro-fitted)
- Motors with planetary gears, enormous brake power
- Wear resistant 268 mm rollers with welded profile surface
- Roller length 1000 mm, standard drive-on height 40 mm
- Wear resistant and modern electronic strain gauge measuring system
- 80 mm rollers
- Prepared for retrofitting of weighing device
- Modular system, all roller sets can be fitted with options
- Compact electric / switchbox, prepared for upgrade
- Drive-over axle load 18 t
- Brake force 34 kN
- Equipped as standard with drive-off system
- Manual / Automatic mode
- Delayed switch-on, start-up monitoring
- Testing program for electronic parking brakes
- Lockable main switch
- Optionally with large easily read analogue display or with PC-connection kit and PC software

Versions:

- Galvanized roller sets for hanging installation
- Wear resistant 268 mm rollers with welded profile surface
- 9 kW motors
- Electrical / switch box with motor protection, control electronics, lockable main switch, 12 m pre-cabling

Special equipment on request!

Optional extras:

- Analog brake force indicator with 2 x 400 mm watches
- LED digital display-D3
- PC software display, basic, test lane og office
- Graphic program and special programs for trucks
- PC connection / ASA livestream / mini computer for ASA livestream (for Germany)
- Installation frame for weighing device (also required if retro-fitted)
- Plastic coated rollers
- Extract for roller set
- Low voltage device
- Larger motors
- Reinforced roller set
- 2nd test speed
- Tramming plate, up to 15 t axle load
- Reversible rotation and measuring device
- Automatic 4-wheel detection (patented)
- Regulated 4-wheel drive
- EDOS (Easy drive-out system - patented)
- Roller cover plate
- Remote control
- Pedal force meter
- Weighing device
- Pressure sensors with options
- Pit safety device (Germany)



Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GmbH


Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH


Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

| Technical data | |
|--|------------------------|
| Drive-over load | 18,000 kg |
| Testing speed | 2.6 km/h |
| Motors | 2 x 9 kW |
| Roller diameter | 268 mm |
| Test width | 1,150 mm |
| Test load | at 50% braking 14 t |
| Fuse | min. 3 x 32 A inert |
| Power supply | 3 x 400 V, N, PE 50 Hz |
| Brake force | 34 kN |
| Dimensions, analogue display box (W x H x D) | 810 x 670 x 70 mm |
| Dimensions, roller set (L x W x H) | 1,390 x 1,145 x 554 mm |

Additional accessories at www.autopstenhoj.com

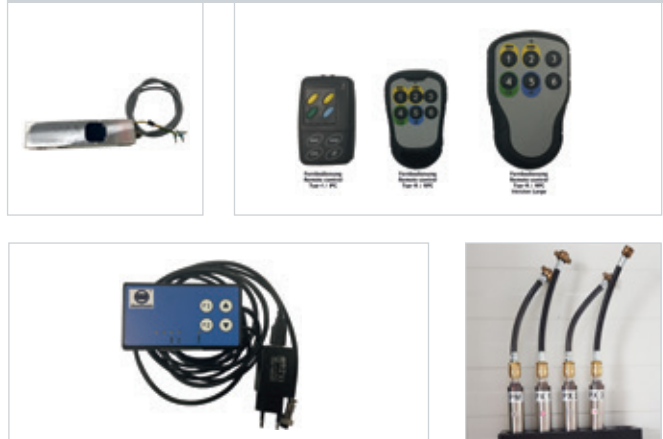

Reinforced roller set

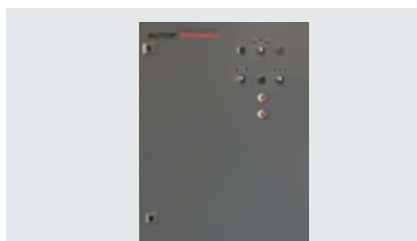

Control box



Sensory rollers of stainless steel



Testmaster RT 187-2



Testmaster RT 187-2