


Masterlift 2.35 Fn 440 Check-in

Electro-hydraulic twin-ram lift, 3.5 t, with platforms and free-wheel lift

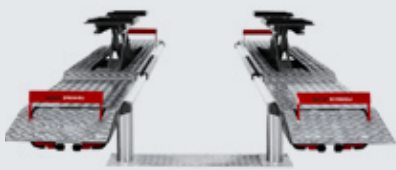

Application

- Check-in
- Testing

Description:

Steel cassette:

- Waterproof steel cassette

Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Pump unit with immersed motor
- Hydraulic oil
- Pneumatic emergency lowering
- Programmable pushbutton control unit

Superstructure:

- Platform (on-floor)
- A set of platforms with drive-on ramps and stops
- Lighting set incl.

Free-wheel lift Fn:

- Free-wheel lift, lengthwise adjustable
- Rubber-coated, non-skid pads
- Low minimum height

Standard colours:

- Platforms: RAL 7016 - grey and aluminium coated
- Free-wheel lift: RAL 7016 - grey

Versions:

Steel cassette:

- Zinc-coated
- Coated

Installation:

- Superstructure on floor

Zinc coating and special colours on request!



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data

Lifting capacity	3,500 kg
Lifting height	1,845 mm
Working height	1,948 mm
Cylinder diameter	2 x 123 mm
Distance between cylinders	1,335 mm
Lifting / lowering time	appr. 30 sec.
Foundation depth	2,615 mm
Pump unit	3 kW
Hydraulic oil	10 l
Voltage	230 / 400 V – 50 Hz – 16 A

Platforms

Total length	5,190 mm
Usable length of platform	4,400 mm
Wheel base	2,400 - 3,300 mm
Platform width	550 mm
Distance between platforms	1,010 mm
Drive-on height	103/148 mm

Free-wheel lift

Length	1,400 - 2,000 mm
Stroke length	370 mm
Lifting/lowering time	appr. 8 sec.
Min. height	30 mm
Working height	2,363 mm

