

Masterlift 2.35 Fv Uni

Electro-hydraulic twin-ram lift, 3.5 t capacity, superstructure with lifting blades



Application

- Check-in
- Wash
- Repairs and maintenance

Description:

Steel cassette:

- Waterproof steel cassette

Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding element
- Pump unit with immersed motor
- Hydraulic oil
- Pneumatic emergency lowering
- Programmable pushbutton control unit

Superstructure:

- Superstructure with lifting blades on floor
- Adaptation to various wheel bases
by re-positioning of lifting blades
- Low minimum height

Standard surface-treatment:

- Hot galvanized

Versions:

Hydraulic unit:

- KA1335 (135) and
KA2285 (230) possible

Steel cassette:

- Hot galvanized
- Coated
- Self-carrying

Installation:

- Superstructure on floor
- Ceiling installation

Optional extras:

- Extra lifting blades



Click the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GmbH


Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH


Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data	
Lifting capacity	3,500 kg
Lifting height	1,950 mm
Working height	1,972 mm
Cylinder diameter	2 x 123 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Motor	3 kW
Hydraulic oil	10 l
Voltage	230 / 400 V – 50 Hz –16 A

Fv Uni Superstructure	
Total length	4,658 mm
Wheel base, min. - max.	1,600 – 3,900 mm
Total width	KA 1335 mm: 765 / 1.045 / 2.101 mm KA 2.285 mm: 1.089 / 2.146 / 2.425 mm
Min. height	22 / 80 mm

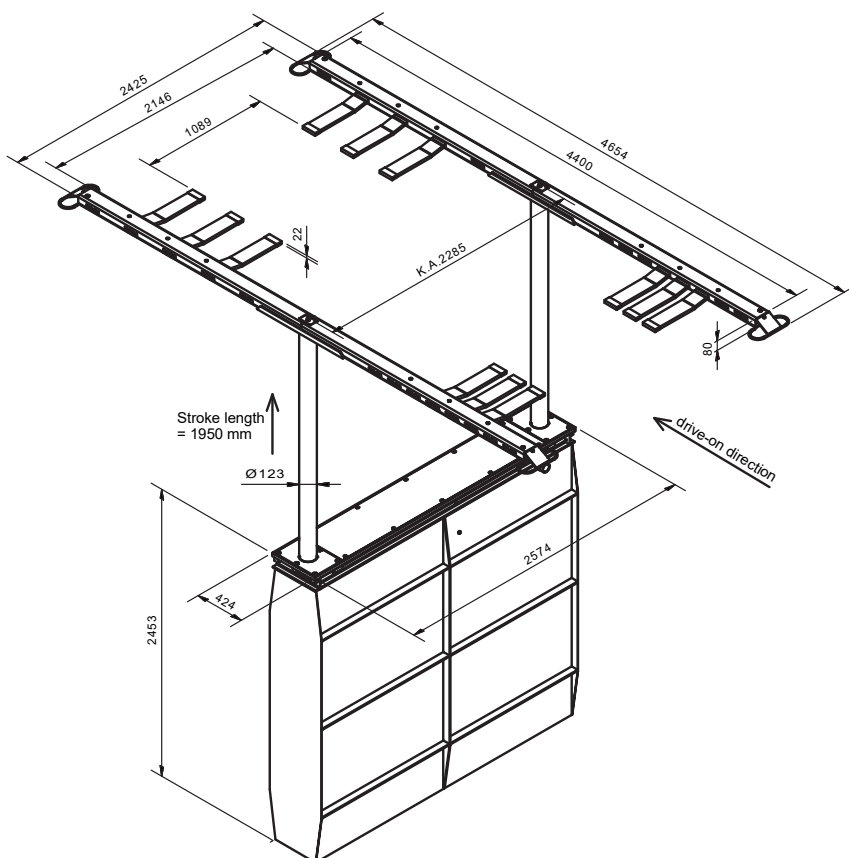

Hard-chrome plated cylinder

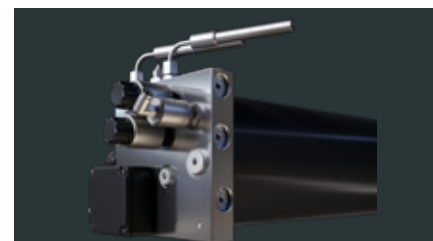

Pump unit with immersed motor



Fitting of lifting blades