

# MagiX 35 LSMG II

Electro-hydraulic mobile short-rise scissor lift, 3.5 t capacity



Product similar to illustration



## Application

- Repair and maintenance
- Tyre change

## Description:

- Double hydraulic system with 2 cylinders under each scissor section, therefore no compressed air and no safety ratchet necessary
- Leverage of full capacity 3.5 t from the lowest position
- Mechanic synchronization through cross-bars
- Emergency lowering valves can manually be opened
- Sturdy scissor construction for high directional stability
- Ramps and platforms made of tear plates, for easy drive-on, also with wet wheels
- Base frames, platforms and ramps galvanized as standard
- Increased stability by roller guides under the platform
- Mobile-kit in standard scope of delivery, consisting of: rollers and lever for moving of the scissor lift
- Rubber blocks 1 set = 4 pcs, H=40 mm included in scope of delivery

## Standard colours:

- Platforms & ramps: galvanized
- Scissors: RAL 7016 – grey

## Versions:

- Available with different voltages

## Optional extras:

- Set of expansion bolts
- Set rubber blocks, 20, 40, 60, 70, 80 and 100 mm



Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**






Sandkampstraße 90  
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

Technical data	
Lifting capacity	3,500 kg
Lifting height	895 mm
Working height	1,000 mm + Rubber pads
Lifting / lowering time	16 sec.
Pump unit	2.2 kW
Voltage	3Ph - 230/400V – 50 / 60 Hz


Scissor platforms	
Platform length	1,420 – 2,100 mm
Platform width	480 mm
Distance between platforms	1,000 mm
Min. height	105 mm
Depth of recess	0 mm

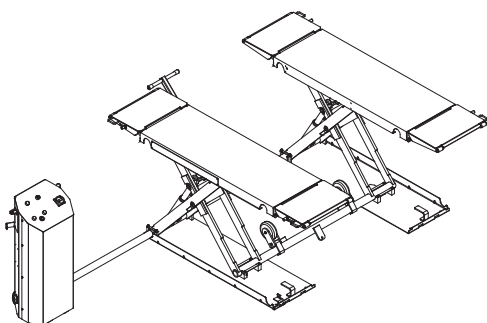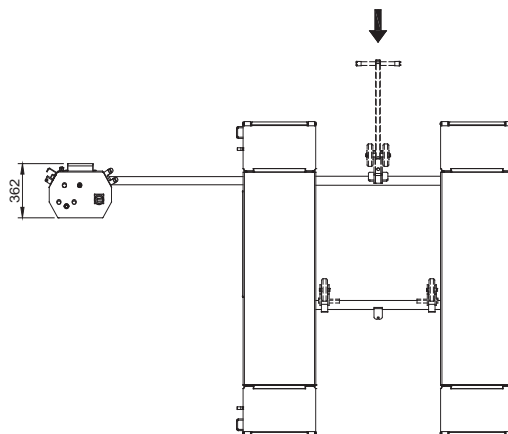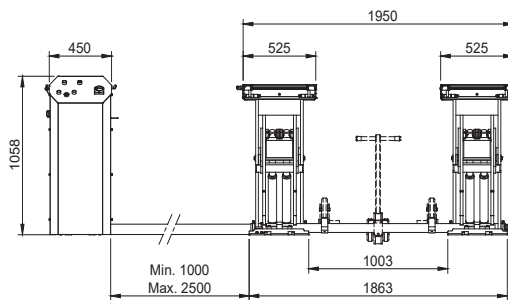

Double hydraulic system, therefore no compressed air required



Mobile-kit for moving the lift

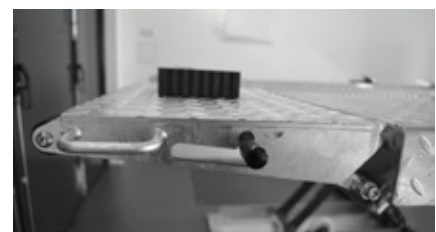

Stable, galvanized ramps made of tear plate, for a better drive-on situation, even in damp conditions