


Masterlift Tele 2.35 Saa

Electro-hydraulic twin-ram telescopic lift, 3.5 t capacity, superstructure with arms

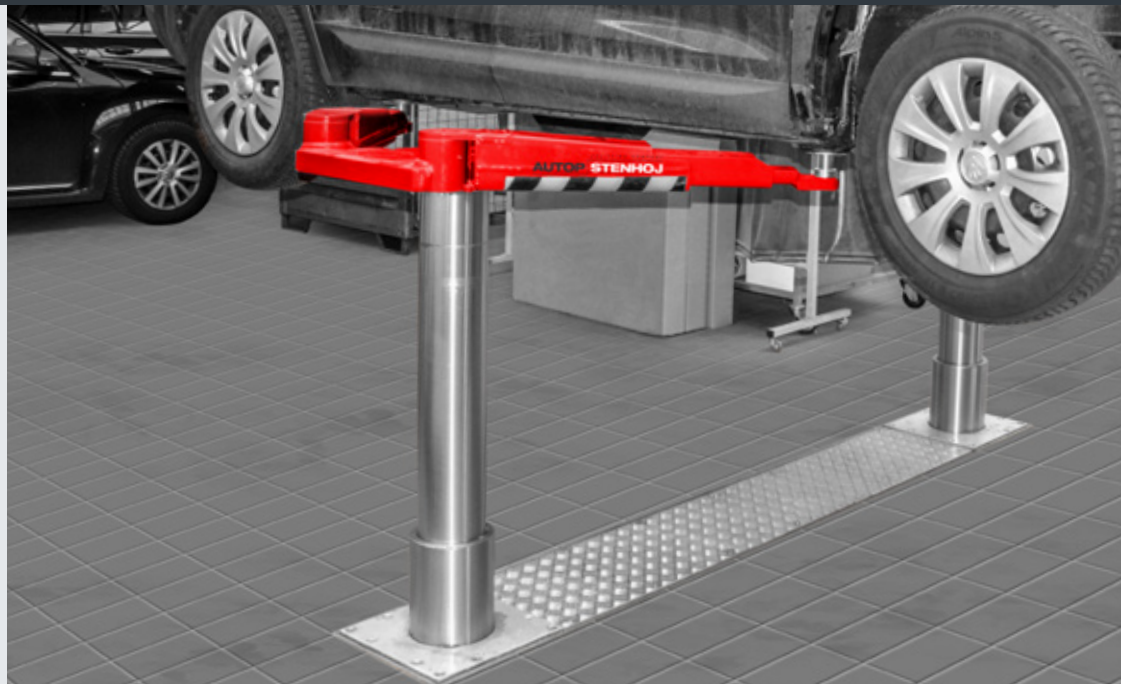

Application

- Body work
- Repair and maintenance

Description:

Steel cassette:

- Waterproof steel cassette
- Self-carrying, therefore especially usable for ceiling installation

Hydraulic unit:

- Hard-chrome plated telescopic reversed cylinders
- Electrical monitoring of synchronization through sensor ladder rack for main level and through wire potentiometer for telescopic level
- Pneumatically operated safety ratchet for main level
- Redundant hydraulic system for telescopic level
- Mechanic anti-rotation device in telescopic cylinders
- Corrosion-free guiding elements
- One hydraulic pump unit with immersed motor per cylinder section
- Ecological hydraulic fluid
- Pneumatic emergency lowering
- Automatic regulation of synchronization through programmable pushbutton control unit, therefore no mechanical connection between both cylinder sections
- Flexible cylinder distances up to max. 2,600 mm

Attention:

Lifting / lowering with just one cylinder section under load only after consultation of our technical department

Superstructure 2.35 Saa:

- Double-telescopic arms
- Internal arm locking system
- Low minimum height
- Low construction height at swivel arm bearing

- Perfect for sports cars - with a minimum height under 100 mm in a width of 1,900 mm

Standard colours:

- Base plates: RAL 7016 -grey
- Arms: RAL 3020 - red

Version:

Steel cassette:

- Hot galvanized
- Synthetic coating
- Fire protection covering

Installation:

- Superstructure on floor
- Ceiling installation

Optional extras:

- Large program of extra pads

Zinc coating and special colours on request!



Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH


Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data

Lifting capacity	3,500 kg
Stroke length	1,905 mm
Working height	Universal: 16007 (2,000 - 2,079 mm)
Cylinder diameter	Ø 213 / Ø 170
Distance between cylinders	flexible, max. 2,600 mm
Lifting / lowering time	approx. 30 / 43 sec.
Foundation depth	1,500 mm
Pump unit	2 x 3 kW
Hydraulic oil	22 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure


Total width	3,000 mm
Inserting height in arm	42 mm
Lifting pad included in the delivery	Universal: 16007 (95 – 174 mm) Sport: 16006 (78 – 110 mm)
Min. height	Uni: 95 – 174 mm Sport: 78 – 110 mm + 50 mm height extension
Drive-through width	Saa 230: 2,070 mm Saa 260: 2,385 mm
Arm length min. - max.	658 – 1,313 mm

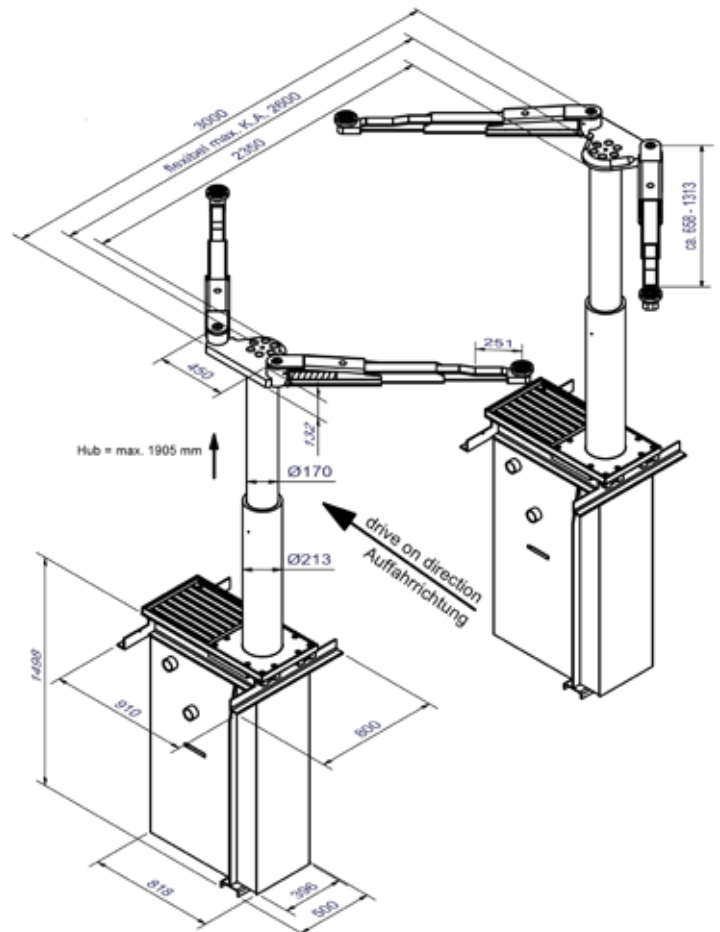

Details hydraulic unit



Pushbutton control and cabinet

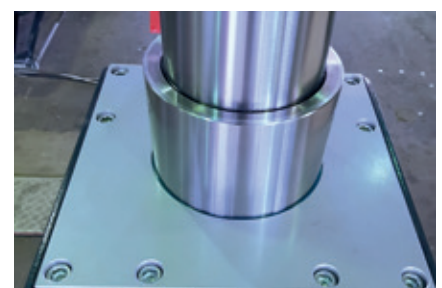

Main and telescopic level