



## MagiX 35 DS II

Electro-hydraulic double scissor lift  
with 3.5 t capacity

**VERTICAL  
POWER**

**NxT Generation - Surface-mounted lifts**



## X-factor at the highest level.

### MagiX 35 DS II:

The double scissor lift MagiX 35 DS II convinces with an **optimal lifting range** from small passenger cars to VW T6 short wheelbase / BMW 7 series long and SUVs.

Thanks to the **low overall height of only  $\leq 100$  mm**, even driving over with flat vehicles is no problem. We achieve full lifting capacity from a low lifting height.

The MagiX 35 DS II comes with a **comfortable working height of over 2 metres**, which is important for ergonomics at the workplace.


The MagiX 35 DS II does not have a predefined drive-on direction, i.e. it can be driven on from both sides and the positioning of the control column can be flexible.

It also **does not require compressed air or a safety ratchet**.

The MagiX 35 DS II scores with lubrication-free teflon sliding bearings in all joints and a **stable scissor construction** that ensures high lateral stability. The **synchronisation** is monitored **electronically**.

### Recommendations / Approvals MagiX 35 DS II:

- BMW / Mini
- Volkswagen Group
- Volvo

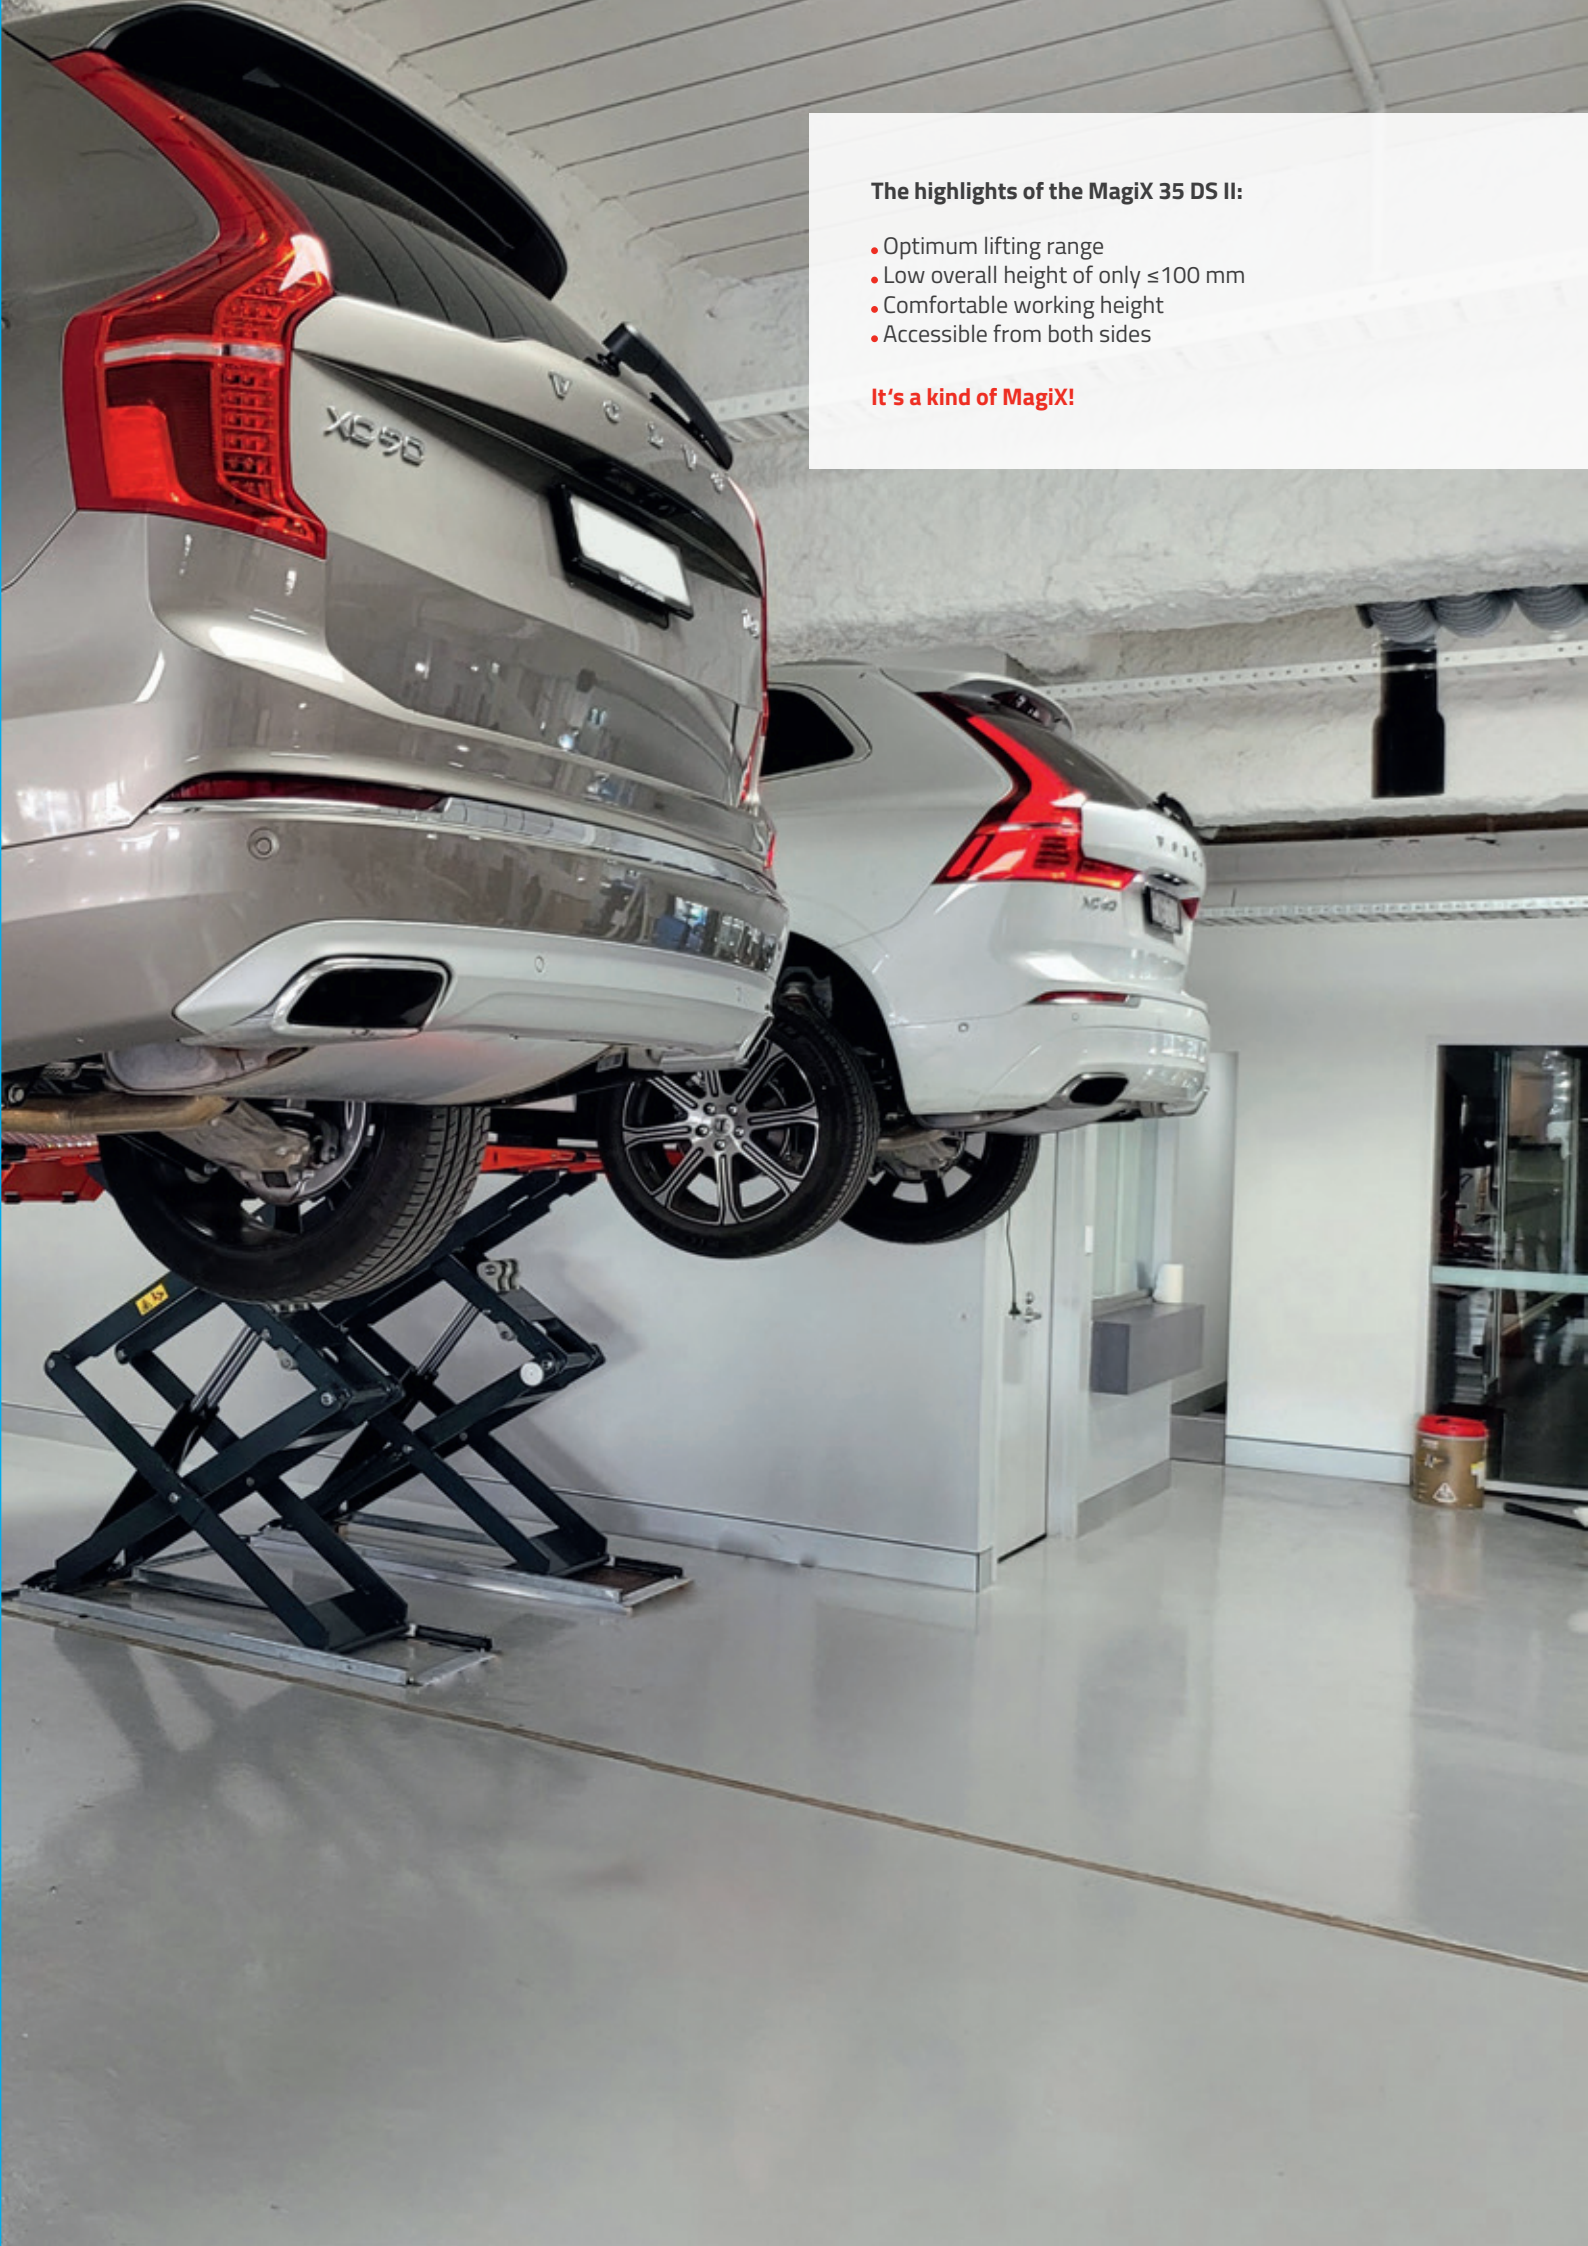

**The highlights of the MagiX 35 DS II:**

- Optimum lifting range
- Low overall height of only  $\leq 100$  mm
- Comfortable working height
- Accessible from both sides

**It's a kind of MagiX!**

# MagiX 35 DS II

## Technical data

<b>Lifting capacity</b>	3500 kg
<b>Stroke length</b>	1923 mm
<b>Working height</b>	2023 mm / 1923 mm + rubber pads
<b>Lifting / lowering time</b>	~ 40/38 sec.
<b>Pump Unit</b>	3 kW
<b>Voltage</b>	3PH- 230/440V- 50/60 Hz
<b>Recommended distance scissor - control column</b>	0.8 - 2 m

### Standard colour:

- Platform & scissor: RAL 7016
- Ramps: RAL 3020

### Versions:

- G = galvanized platforms
- Short (310 & 310 mm) and long (310 & 410 mm) drive-on ramps available

## Scissor platform

<b>Platform length</b>	Short: 1480 - 2100 mm Long: 1480 - 2200 mm
<b>Platform width</b>	625 mm
<b>Platform height</b>	On-floor: ≤ 100 mm Recessed: 0 mm
<b>Distance between platforms</b>	900 mm (recommended)
<b>Depth of recess</b>	On-floor: 0 mm Recessed: 100 mm

### Options:


- Set of expansion bolts
- LED-lighting set for surface-mounted installation
- Installation frame galvanized, for recessed installation
- Rubber blocks in different heights
- Hose extensions incl. covers
- Additional long drive-over ramps for lowered cars
- On-floor or recessed installation with the same lift




# MagiX 35 DS II

AUTOP UPLIFTING COMPANY STENHOJ

Electro-hydraulic double scissor lift  
with 3.5 t capacity

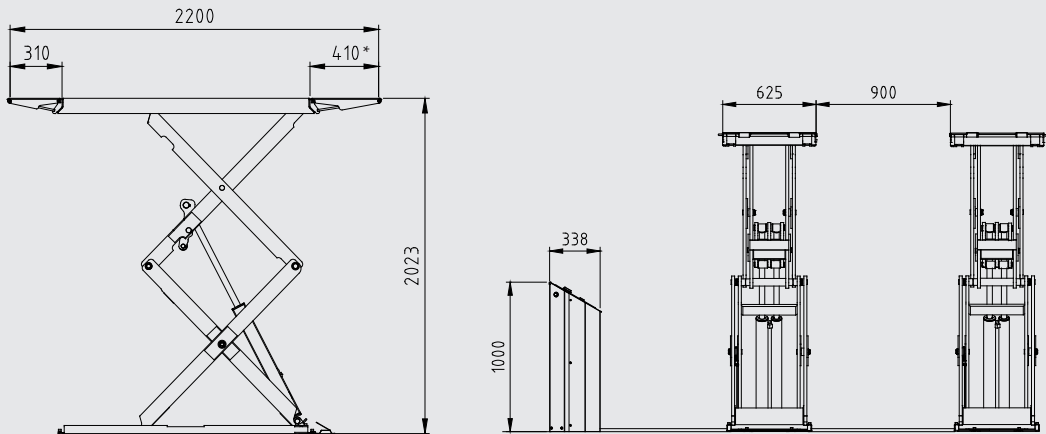




\*also available with 310 mm ramp, total length 2100 mm

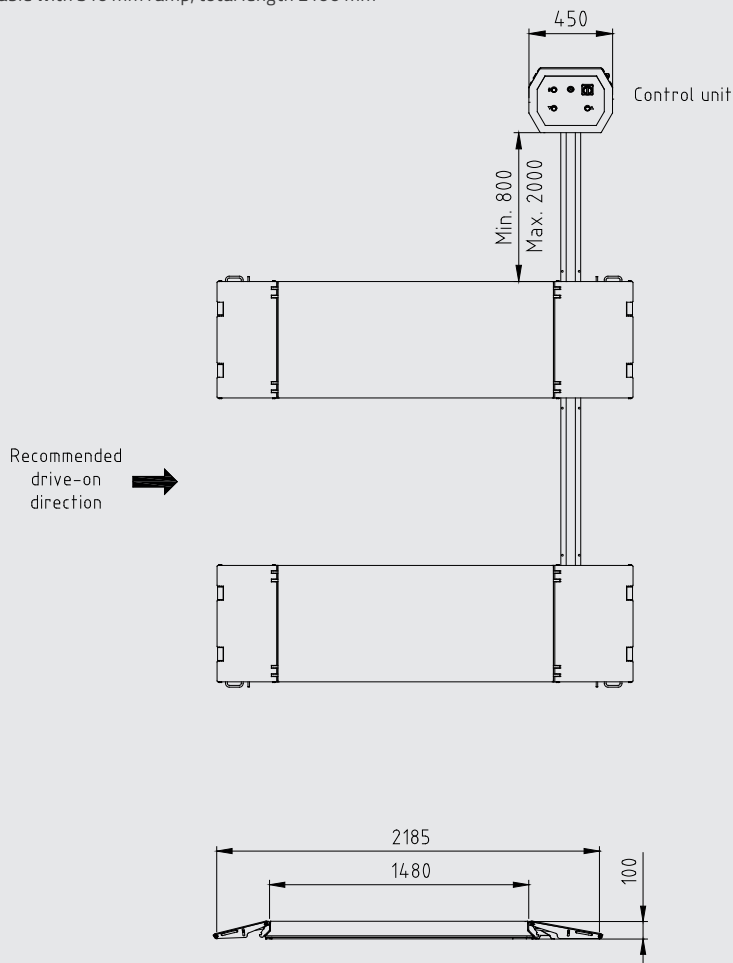

The MagiX 35 DS II can also be installed recessed in the floor.  
You can find more information and dimensional sketches at [www.autopstenhoj.com](http://www.autopstenhoj.com).

# MagiX 35 DS II

UPLIFTING COMPANY  
**AUTOPSTENHOJ**

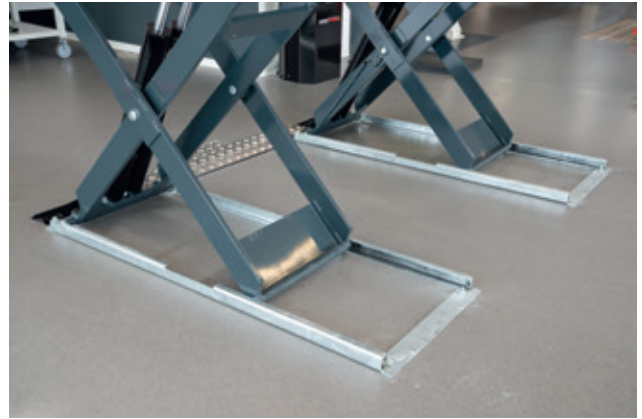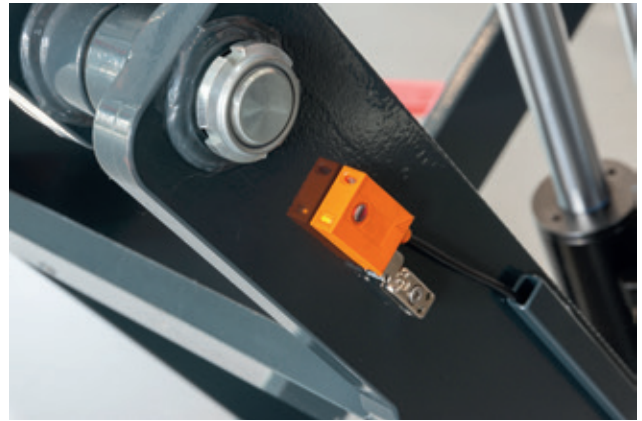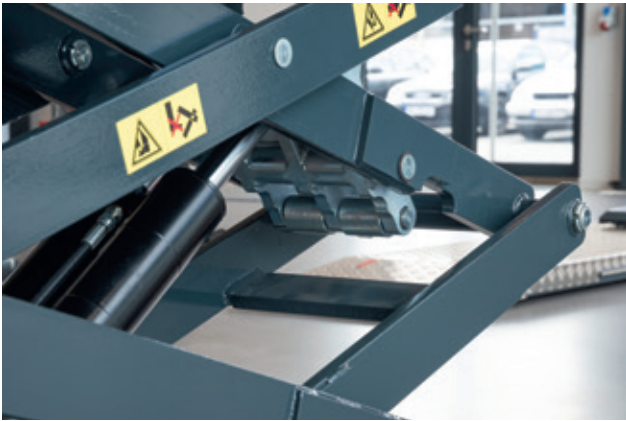

[www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**  
Sandkampstr. 90 | 48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)